Sergii Babichev Dmytro Peleshko Olena Vynokurova (Eds.)

Communications in Computer and Information Science

1158

Data Stream Mining & Processing

Third International Conference, DSMP 2020 Lviv, Ukraine, August 21–25, 2020 Proceedings





Editors
Sergii Babichev
Department of Informatics
Univerzita Jana Evangelisty
Purkyně v Ústí nad Labem
Ústí nad Labem, Czech Republic

Olena Vynokurova
Kharkiv National University of Radio Electronics
Kharkiv, Ukraine

Dmytro Peleshko DeoGuard
Kharkiv, Ukraine

ISSN 1865-0929 ISSN 1865-0937 (electronic)
Communications in Computer and Information Science
ISBN 978-3-030-61655-7 ISBN 978-3-030-61656-4 (eBook)
https://doi.org/10.1007/978-3-030-61656-4

© Springer Nature Switzerland AG 2020

This work is subject to copyright. All rights are reserved by the Publisher, whether the whole or part of the material is concerned, specifically the rights of translation, reprinting, reuse of illustrations, recitation, broadcasting, reproduction on microfilms or in any other physical way, and transmission or information storage and retrieval, electronic adaptation, computer software, or by similar or dissimilar methodology now known or hereafter developed.

The use of general descriptive names, registered names, trademarks, service marks, etc. in this publication does not imply, even in the absence of a specific statement, that such names are exempt from the relevant protective laws and regulations and therefore free for general use.

The publisher, the authors and the editors are safe to assume that the advice and information in this book are believed to be true and accurate at the date of publication. Neither the publisher nor the authors or the editors give a warranty, expressed or implied, with respect to the material contained herein or for any errors or omissions that may have been made. The publisher remains neutral with regard to jurisdictional claims in published maps and institutional affiliations.

This Springer imprint is published by the registered company Springer Nature Switzerland AG The registered company address is: Gewerbestrasse 11, 6330 Cham, Switzerland

Contents

| Hybrid Systems of Computational Intelligence | |
|--|------------|
| On-Line Relaxation Versus Off-Line Spectral Algorithm in the Learning of Polynomial Neural Units | 3 |
| The Principles of Organizing the Search for an Object in an Image, Tracking an Object and the Selection of Informative Features Based on the Visual Perception of a Person | 22 |
| Software and Algorithmic Support for Finite-Element Analysis of Anisotropic Heat-and-Mass Transfer Using Parallel and Cloud Technologies | 45 |
| Yaroslav Sokolovskyy, Andriy Nechepurenko, Ivan Sokolovskyy, and Olha Mokrytska | |
| Hybrid Deep Convolutional Neural Network with Multimodal Fusion Olena Vynokurova, Dmytro Peleshko, and Marta Peleshko | 62 |
| Modeling and Forecasting of Innovative, Scientific and Technical Activity Indicators Under Unstable Economic Situation in the Country: Case of Ukraine Liubov Halkiv, Oleh Karyy, Ihor Kulyniak, and Solomiya Ohinok | 7 9 |
| The Issue of Efficient Generation of Generalized Features in Algorithmic Classification Tree Methods | 98 |
| Technique of Metals Strength Properties Diagnostics Based on the Complex Use of Fuzzy Inference System and Hybrid Neural Network Sergii Babichev, Bohdan Durnyak, Oleksandr Sharko, and Artem Sharko | 114 |
| Noise-Resistant Non-equidistant Data Conversion | 127 |
| An Empirical Mode Decomposition Based Method to Synthesize Ensemble Multidimensional Gaussian Neuro-Fuzzy Models in Financial Forecasting Alexander Vlasenko, Nataliia Vlasenko, Olena Vynokurova, and Dmytro Peleshko | 140 |

| Methods of Objective Clustering Quality Criteria Using Inductive | 150 |
|---|-----|
| Sergii Babichev, Aleksander Spivakovskiy, and Jiří Škvor | |
| Assessing the Investment Risk of Virtual IT Company Based on Machine Learning | 167 |
| Taras Lendyuk, Andrii Fomenko, and Ivan Kit | |
| Methodological Support for the Management of Maintaining Financial Flows of External Tourism in Global Risky Conditions | 188 |
| Technology for Determining the Residual Life of Metal Structures Under Conditions of Combined Loading According to Acoustic Emission Measurements. Volodymyr Marasanov, Dmitry Stepanchikov, Artem Sharko, and Oleksandr Sharko | 202 |
| Expansion of the Capabilities of Chromatography-Mass Spectrometry Due to the Numerical Decomposition of the Signal with the Mutual Superposition of Mass Spectra | 218 |
| Machine Vision and Pattern Recognition | |
| Statistical Methods for Analyzing and Processing Data Components When Recognizing Visual Objects in the Space of Key Point Descriptors Volodymyr Gorokhovatskyi, Svitlana Gadetska, Oleksii Gorokhovatskyi, and Roman Ponomarenko | 241 |
| Sewer Pipe Defects Classification Based on Deep Convolutional Network with Information-Extreme Error-Correction Decision Rules | 253 |
| Critical Modes of Photography: Light Sensitivity and Resolution | 264 |
| Multiclass Image Classification Explanation with the Complement | |
| Perturbation Images | 275 |

| Contents | xiii |
|---|------|
| Image Enhancement in Automatic Mode by Recursive Mean-Separate Contrast Stretching | 288 |
| Method of Speech Signal Structuring and Transforming for Biometric Personality Identification | 307 |
| Method of Improving Instance Segmentation for Very High Resolution Remote Sensing Imagery Using Deep Learning | 323 |
| Computer Vision System for Recognizing the Coordinates Location and Ripeness of Strawberries | 334 |
| Dynamic Data Mining and Data Stream Mining | |
| Novel Nonparametric Test for Homogeneity and Change-Point Detection in Data Stream | 347 |
| Modeling of Animator Studio Control Service Functionality Using Data Mining Tools | 357 |
| On-Line Data Processing, Simulation and Forecasting of the Coronavirus Disease (COVID-19) Propagation in Ukraine Based on Machine Learning Approach | 372 |
| Detecting Items with the Biggest Weight Based on Neural Network and Machine Learning Methods | 383 |

Big Data and Data Science Using Intelligent Approaches

Viktor Morozov, Olga Mezentseva, Grigory Steshenko,

Interaction Based on Data Mining.....

and Maksym Proskurin

Product Development of Start-up Through Modeling of Customer

399

| Developing a Simulation Model of the Information Gathering System | |
|--|-----|
| Within the "Smart Packaging" Concept | 416 |
| The Use of the "Digital Twin" Concept for Proactive Diagnosis of Technological Packaging Systems | 432 |
| Identification of Predictors of Burnout Among Employees of Socially Significant Professions. Igor Zavgorodnii, Olha Lalymenko, Iryna Perova, Polina Zhernova, and Anastasiia Kiriak | 445 |
| Software for Shelter's Fire Safety and Comfort Levels Evaluation Yevgen Martyn, Olga Smotr, Nazarii Burak, Oleksandr Prydatko, and Igor Malets | 457 |
| Methods for Forecasting Nonlinear Non-stationary Processes in Machine Learning | 470 |
| Bayesian Regression Approach for Building and Stacking Predictive Models in Time Series Analytics | 486 |
| Forest Cover Type Classification Based on Environment Characteristics and Machine Learning Technology | 501 |
| Approach for Modeling Search Web-Services Based on Color Petri Nets Aleksandr Gozhyj, Irina Kalinina, Victor Gozhyj, and Valeriy Danilov | 525 |
| Intelligence Information Technologies for Financial Data Processing in Risk Management | 539 |
| Author Index | 559 |



Software for Shelter's Fire Safety and Comfort Levels Evaluation

Yevgen Martyn, Olga Smotr, Nazarii Burak (☑), Oleksandr Prydatko, and Igor Malets

Lviv State University of Life Safety, Lviv, Ukraine evmartyn@gmail.com, olgasmotr@gmail.com, nazar.burak.ac@gmail.com, olexandrprydatko@gmail.com, igor.malets@gmail.com

Abstract. The article deals with the problem of public awareness about existing special purpose buildings such as protective buildings and shelters that can be used to protect against emergencies. The status update on the problem is considered. The recent scientific papers in the field of modern information technologies integration into civil protection system were analyzed during research. The necessity of the use of modern informational graphic technologies for fire safety level evaluation in such type of shelters was substantiated. The features of actual data visualization with the involvement of mathematical transformations and methods of visual information graphing are investigated based on the offered methods of visualization graphics information. The software emulator "Fireware Emulator" has been developed. It can be used for fire safety level evaluation in buildings of such type.

Keywords: Informational technologies \cdot Software \cdot Emulator \cdot Shelter \cdot Civil protection \cdot Room plan

1 Introduction

The current integration state of modern information technologies for human life environment initiate appearance of new natural threats which can be serious risks for its normal and safety life. Military conflicts and the risks for using mass destruction weapon forced us to make protective purpose buildings - safety places such as housing units and shelters where peoples could stay and live during emergency situation.

Based on the daily facts of human life process both society and its individual members, we observe a progressive tendency towards increasing potential threats to humanity. The amount of the increasing anthropogenic and natural character risks is proportional to the number of tasks to be undertaken for ensure the safety of human life. Among these problems, we could highlight the problems of peoples safe staying in protective purpose buildings: housing units and shelters.

The process of necessary building choosing is based on own human's preferences, its geographic location, type of emergency situation and other additional

[©] Springer Nature Switzerland AG 2020 S. Babichev et al. (Eds.): DSMP 2020, CCIS 1158, pp. 457–469, 2020.




Fig. 1. Flowchart of necessary protective purpose buildings choosing process

factors. But, the most important among them is security (Fig. 1). First, in such protective building, user should to determine the state of fire safety, the possibility of safe evacuation from the rooms and the comfortableness level of staying. After it, on the basis of visualized data about protective building, human should to analyze the possible deterioration causes of the situation in the shelter and to identify ways to better its planning. All upgrades must be produced by taking into account the position of ensuring proper level of fire safety. If the emergency situation will appear and it is necessary to use protective building or air raid shelter, user should know in advance all important data including comfortableness level and safety stay within them.

The main requirements that applies to protective buildings and shelters are regulated by the relevant state documents and the Civil Protection Code of Ukraine. These documents specify the external and internal parameters of the protective buildings. External includes geographical location and distance from neighboring homes, and internal includes buildings configuration and planning of elements for safe staying users indoors. However, it is also important for users to have actual information about such buildings.

2 Literature Review and Problem Statement

Review of recent international research shows numbers of existing developments in the fire safety field, particularly about uses of information technologies to improve human's life safety. The complete process of modeling protective environment in buildings for different purpose including shelters has been describing in detail by scientists. In [6] the authors explored some aspects and approaches for creation of user-oriented mobile information technologies. This software is developing for individual use to help people in choosing suitable fire protective building where they could hide during emergency situation. In accordance with

[7], the authors analyzed the fire safety requirements to information technology for implementation in selected commercial building. The main practical requirements to information technologies for fire safety providing in different types of buildings are highlighted and analyzed in [4,11,12].

Researches [1–3,8,9] refer the evaluation system of building fire emergency response capability maturity (FE-CMM) that based on the capability maturity model (CMM). Mostly, they considered the acceptable ways for emergency situations response. Authors declared that the proposed module could preliminarily realize the intelligent evaluation of building fire emergency response capability. Moreover, it able to improve the practice and intelligence of the fire emergency response capability evaluation, especially in smart cities. Studies [5,10] analyzed the main features of developing, improvement and uses of modern information technologies in the field of civil protection, particularly during implementation of safety-oriented emergency response projects.

However, there are still little number of studies that related to software development for protective buildings safety evaluation, as well as for situation comparing capability in different buildings during best option choosing process. Today, there are also not enough information about qualitative evaluation of information technology impact to decision making process of choosing particular building type.

Current state regulatory documents determine all requirements to protective structures, buildings and shelters arrangement, particularly, from the point of safe stay in them. But, due to requirements universality and generality, shelters are objectively limited in ability of getting attention to each ones. The reason of it – lack of a real possibility to create completely safe building for a long stay. As a result, people must make choice of protective building and carry out its arrangement by themselves. This can be possible only in the cases, when the following conditions will be performed:

- the choice of each protective building or shelter is based on both its level of comfortableness and fire protection;
- all possible ways of getting to the protective building or shelter are analyzed depend on humans' location during an emergency;
- information technologies are used as a helping tool to make choice of protective building;
- preliminary prediction is made to determine unforeseen occasions appearance possibility during humans' stay in shelter;
- it is possible to make own additions to the contingency plan.

Therefore, according to previously outlined problems, developing of graphic information technology for fire safety evaluation of protective purpose buildings is one of the most important and urgent task in nowadays moving world.

3 Substantiation of the Use of Data Visualization Methods in Protective Buildings Fire Safety Evaluation Process

In general, users informational content I concerning protective buildings or shelters includes two components: visual (presence component) and virtual (technological component) object review. Some users can get necessary information directly by observing selected object without using any information technology (IT), while others can use special software. Bases on this and according to [8], informational content I could be determine by the following equation:

$$I = u + iv = (x + iy)^3 \tag{1}$$

where u and v are the components of information content without and with the use of information technology respectively; x is the presence component parameter that indicate the level of knowledge about object without using IT; y is the technological component parameter that indicate the level of knowledge about object with using IT.

Parameter y also takes into account both the level x' of knowledge about the object(building) and f - the use of developed application:

$$y = x' + f \tag{2}$$

In most cases, x' does not always equal to x, but for simplifying research, we accept that x = x'. According to this, (1) takes the following form:

$$I = u + iv = x \cdot ((4x^2 + 6xf + 3f^2) + i \cdot (x^2 - 3f^2))$$
(3)

The working range of variables x and f in information content I level determining process is within the range from 0 to 1. Equation (3) determines information contents value I as a direct numerical dependence to the parameter x: for each level of information support f, the value of information content is equal to zero if x = 0. As result, information content components u and v define functions x and y. Thus, if we take these conditions into account, components values will determine like (4) and (5):

$$u = 4x^2 + 6xf + 3f^2 (4)$$

$$v = x^3 - 3xf^2 \tag{5}$$

If user does not use software for help in choosing suitable shelter and condition (2) is fulfilled, the value of components u and v will determine (6) and (7):

$$u = 4x^3 \tag{6}$$

$$v = x^3 \tag{7}$$

Component v has value change restriction (8) of x and f. In our research, we use only positive values that fits condition x > 3f = a and belongs to zone **A** (Fig. 2).

$$v = x \cdot (x^2 - 3f^2) = x \cdot (x - \sqrt{3f}) \cdot (x + \sqrt{3f})$$
(8)




Fig. 2. Restriction zones of parameters

Now, let us to determine the influence of parameters x and f for component u (4) values change. Even if x gets small values, such as x = 0.1, the values of component u increases extremely fast (Fig. 3). This proves the efficiency of using information technologies f.




Fig. 3. Dynamics of component u values change

The information contents' component v is determined by the amount of knowledge set (x' = x) about buildings fire safety state according to which IT is used for help. The main condition that applies to v it is $x' = x > \sqrt{3f}$ (Fig. 4).



Fig. 4. Dynamics of component v values change

4 Software Development Procedure for Shelter's Fire Safety and Comfort Levels Evaluation

Information technologies and its use in the field of Civil Defense can solve problem of visualizing data about protective purpose buildings. Basically, proposed emulator will work with graphical parameters of the buildings, which are used during its floors plan creation. Also, there will be possibility to add another data, such as temperature of the shelter environment, the presence of fire extinguishers, etc. If we take into account all this conditions, it becomes possible to build model of data visualisation process in emulator (Fig. 5).




Fig. 5. Information model of data visualization process about protective purpose buildings with use of emulator

Here, $\mathbf{1}$ is the emulator software operation block: TP is the technological process of emulator creation; YT is control units; OC is the provision by programmers; TO is the level of equipment provision; MO is the material resources;

EO is the energy resources; IO is the financial value of technology; YP is the software resources; $\mathbf{2}$ is the functional parameters of providing data visualization processes: VC is the emulator implementation environment; TL is the involved information technologies to the emulator creation process; CC is the level of performers provision; TI is the level of information provision; DI is the level of GPS monitoring technologies involvement; DI is the level of easy getting to the building; CI is the transport infrastructure near buildings location; YC is the basic standards for program creation; $\mathbf{3}$ is the visualization resources: PD is the output product of emulator; EI is the programmers team; EI is the product of created program; EI is the technical means; EI is the material resources; EI is the energy resources; EI is the information resources; EI is the IT project team.

A flowchart of proposed software development stages was designed to facilitate the process of its programming (Fig. 6). The emulator has friendly user interface, is quite reliable and provides high speed of safety evaluate algorithm calculation.

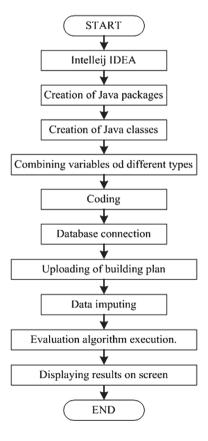


Fig. 6. The flowchart of the "Fireware Emulator" development process

Software is designed as an emulator program "Fireware Emulator". For its development were chosen Java software. "Fireware Emulator" allows users to evaluate protective buildings or shelters safety level.

Java is an object oriented language which gives a clear structure to programs. There are some major advantages of this language. Java is straightforward to use, write, compile, debug, and learn than alternative programming languages. Object oriented programming is associated with concepts like class, object, inheritance, etc. which allows you to create modular programs and reusable code. Java code runs on any machine that doesn't need any special software to be installed. Those advantages are essential in developing secure, powerful device or computer system that gives you possibility for quick use of the right class and method. Software emulator "Fireware Emulator" was developed using Intellij IDEA 2019.1 Community Edition.

Designed sofware as an emulator program allows users evaluate the security level of shelters independently. The software supports different types of protective buildings and their plans. An algorithm for the process of choosing a safe building is presented in Fig. 7.



Fig. 7. The flowchart of protective building choosing process

User obtains actual information about buildings fire safety level and it can check its reliability and evaluate his own protection in emergencies. This is possible by integrating buildings plan into emulator's database. When buildings or shelters plans are importing into software database, the following parameters must be specified: inner temperature, height and width of the room, a wall material, the number of persons who may present at the same time. Lighting and air filtration settings are also available. Based on all this data, the program makes analyze and outputs the result of security level evaluation.

Software adaptation to the real conditions of the shelters and protective buildings was provided by changes of their plans. They are made based on additional perimeter measurements. Emulator "Fireware Emulator" stores visualized data of plan in its database which makes them acceptable for changes up to different conditions.

The emulator interface for the school building is shown in Fig. 8.

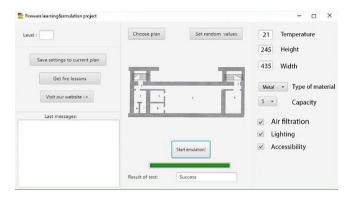


Fig. 8. Initial parameters values setting in software "Fireware Emulator"

Input parameters are the following: two hundred sixty-three students and four teachers will be staying in building at the same time and each of them had passed a fire safety courses; there are four floors, three emergency exits and fifteen fire extinguishers; all-day water supply.

Developed software is open for updates. There is an opportunity to quickly add plans of buildings, functionality, providing reliability, accessibility and multiplatform. A high level of protection against unauthorized changes to the code was used.

5 The Use of the Developed Software for Fire Safety Evaluation Procedure

The next stage of the research is analyzing correctness of the software algorithms. There were 4 practical experiments conducted using different input parameters, protective building plans and squares.

Experiment 1. Input parameters used in experiment: storage temperature - $21\,^{\circ}$ C, height - 2.45 m, width - 4.35 m, wall material - metal construction, number of persons - 5. The result of emulation (Fig. 9) demonstrates that such protective building complies to all standards and regulations and is completely safe to stay in an emergency.

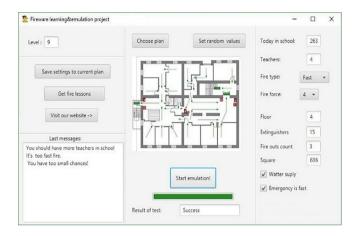


Fig. 9. Experiment 1: result of "Fireware Emulator" running with imput parameters

The program provides a large number of parameters combinations. The algorithm selects the most optimal combination by analysing of given data [8]. In the case of inconsistency, the program produces a negative result.

Experiment 2. Were used parameters which are not complies to standards or regulatory documents. Due to input parameters, this shelter is uncomfortable for staying and the result of fire safety evaluation is negative (Fig. 10).

This is because there is no ability to avoid the danger: the building has a large square and only one spare exit, the number of people is too big, the fire ignites quickly and there are only eight fire extinguishers.

Experiment 3. A shelter with small square were analysed. Also, there were a low wall height and inside temperature (8 °C), the number of staying persons - 6. According to the normative documents, such protective building is not suitable for a comfortable staying despite positive level of fire safety evaluation. The result of the program demonstrates a similar conclusion (Fig. 11).

Experiment 4. A graphic information window for displaying problems which must be solved to increase both fire safety and comfortability levels is predicted in developed software "Fireware Emulator". Figure 12 presents the result of evaluation process in accordance with the input parameters. The text message with recommendations is displayed in the information window.

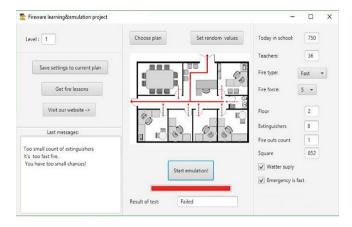


Fig. 10. Experiment 2: the result of buildings fire safety evaluation with many people inside




Fig. 11. Experiment 3: negative result of shelter staying comfortability

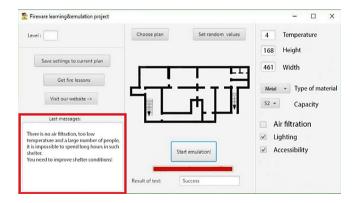


Fig. 12. The result of evaluation process with generated recommendations

6 Discussion of the Results

Analyses of input conditions that were applied and received results of fire safety level evaluation and presented recommendations (Fig. 12) shows that the algorithm of message output is correct and emulator works good. The inside temperature of 4 degrees above zero storage does not correspond to the norm, the height - 1.68 m and the width - 4.61 m. In this experiment, there is lighting, but no air filtration. All this conditions are dangerous and not comfortable for staying of 52 people in shelter.

The results obtained in the experiments meet the requirements of state standards for shelter safety and confirm the need for such software development. The errors and deviations of the program are minimal, and their analysis indicates correctively of algorithms calculations.

7 Conclusions

Current rates of science and technology development, integration of information technologies into everyday life of society, state of ecology and influence of anthropogenic factor on the environment lead to appearance of new emergencies. The ability to make the right decisions in such circumstances is a guarantee of safety human's life. That is why it is so important for human today to have as much as possible information about around environment.

Software was developed as an emulator program to help people in process of protective buildings fire safety level evaluation. The emulator program "Fireware Emulator" is a product of universal purpose. It helps to determine the level of person's security staying in protective purpose buildings. Developed software is designed for personal use. Performance of the program can be enhanced by the combination of prior knowledge about object and the information component comparing. Also were made mathematical substantiation of evaluation algorithms execution correctness.

Integration of the latest information technologies in the field of civil protection will provide to society an effective tool for analyzing and using data to explore possible ways of avoiding or protecting against emergencies.

References

- Cheng, J., Tan, Y., Song, Y., Mei, Z., Gan, V., Wang, X.: Developing an evacuation evaluation model for offshore oil and gas platforms using BIM and agent-based model. Autom. Constr. 89, 214–224 (2018). https://doi.org/10.1016/j.autcon.2018. 02.011
- Granda, S., Ferreira, T.M.: Assessing vulnerability and fire risk in old urban areas: application to the historical centre of Guimarães. Fire Technol. 55(1), 105–127 (2018). https://doi.org/10.1007/s10694-018-0778-z
- 3. Kwok, N., Bratiotis, C., Luu, M., Lauster, N., Kysow, K., Woody, S.R.: Examining the role of fire prevention on hoarding response teams: Vancouver fire and rescue services as a case study. Fire Technol. **54**(1), 57–73 (2017). https://doi.org/10. 1007/s10694-017-0672-0

- Ma, G., Tan, S., Shang, S.: The evaluation of building fire emergency response capability based on the CMM. Int. J. Environ. Res. Public Health 16(11), 1962 (2019). https://doi.org/10.3390/ijerph16111962
- Malets, I., Popovych, V., Prydatko, O., Dominik, A.: Interactive computer simulators in rescuer training and research of their optimal use indicator. In: Proceedings of the 2018 IEEE Second International Conference on Data Stream Mining and Processing (DSMP), pp. 558–562 (2018). https://doi.org/10.1109/DSMP.2018.8478486
- Martyn, Y., Ljaskovska, S., Tarapata, N.: Emulator of analysis of bombshelters. Sci. Bull. Tavria Agrotechnological State Univ. 1(9) (2019). https://doi.org/10. 31388/2220-8674-2019-1-62
- Mishra, A., Shrestha, A.: Assessment of exit requirements for fire safety of commercial buildings, Kathmandu, Nepalemulator of analysis of bombshelters. Int. J. Emerg. Technol. Innov. Res. 4(10), 248–255 (2017). https://doi.org/10.1717/JETIR.17074
- Ratushnyi, R., Khmel, P., Tryhuba, A., Martyn, E., Prydatko, O.: Substantiating the effectiveness of projects for the construction of dual systems of fire suppression. Eastern-Euro. J. Enterp. Technol. 4, 46–53 (2019). https://doi.org/10.15587/1729-4061.2019.175275
- Rego, A., Garcia, L., Sendra, S., Lloret, J.: Software defined network-based control system for an efficient traffic management for emergency situations in smart cities. Future Gener. Comput. Syst. 88, 243–253 (2018). https://doi.org/10.1016/j.future. 2018.05.054
- Smotr, O., Borzov, Y., Burak, N., Ljaskovska, S.: Implementation of information technologies in the organization of forest fire suppression process. In: Proceedings of the 2018 IEEE Second International Conference on Data Stream Mining and Processing (DSMP), pp. 157–161 (2018). https://doi.org/10.1109/DSMP.2018. 8478416
- 11. The Hong Kong Buildings Department: Code of practice for fire safety in buildings (2011). https://www.bd.gov.hk/doc/en/resources/codes-and-references/code-and-design-manuals/fs2011/fs2011-full.pdf
- U.S. Department of Labor, Occupational Safety and Health Administration: Emergency exit routes fact sheet (2018). https://www.osha.gov/OshDoc/data-Genera-Facts/emergency-exit-routes-factsheet.pdf